


**SN3-S Ø 4,2**



**Application**

Self drilling fastener, stainless steel A2, for aluminium applications

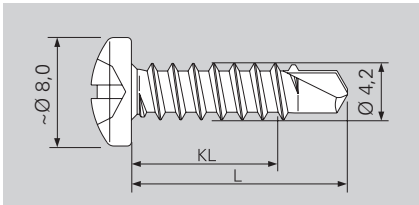

KL= clamping length L = length

**Head shape / drive**


Pan-head / SR drive



**Additional informations**

**Fastener:**

- stainless steel A2, self drilling fastener
- SR recess - stick-fit, wobble free



**Technical value**

**Shear load  $Q_B$  (N)**

**4'000 N**

**Tensile fracture  $Z_B$  (N)**

**5'500 N**

**Torsion  $M_t$  (Nm)**

**3,5 Nm**

**Handling guideline for automatic processing**

- speed under load 1800 - 2000 U/min.
- axial load 200 - 300 N
- trouble-free processing with SR drive

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent guaranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.