


COOL-FIT 2.0 Flexschlauch



Ausführung:

- EPDM Flexschlauch mit Edelstahl Schutz
- Messinganschlusssteile
- Vorisololation aus NBR Schaum mit Schutzmantel schlag- und reissfest
- Mit loser Überwurfmutter GA an einem Ende und Aussengewinde G am anderen

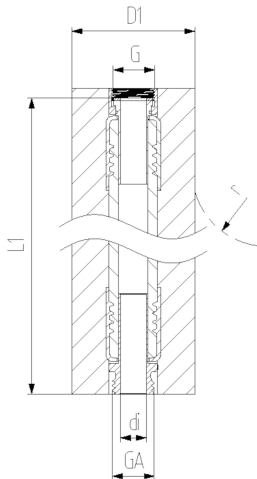

d	DN	G/GA	PN	Code	L1	di	D1	r
(mm)	(mm)	(inch)	(bar)		(mm)	(mm)	(mm)	(mm)
20	15	1/2"	10	738 924 206	1000	15	39	119
25	20	3/4"	10	738 924 207	1000	19	44	156
32	25	1"	10	738 924 208	1000	25	51	192
40	32	1 1/4"	8	738 924 209	1500	32	59	252
50	40	1 1/2"	6	738 924 210	2000	38	69	312
63	50	2"	6	738 924 211	2000	52	82	372

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>