Datenblatt

gültig ab: 13.08.19

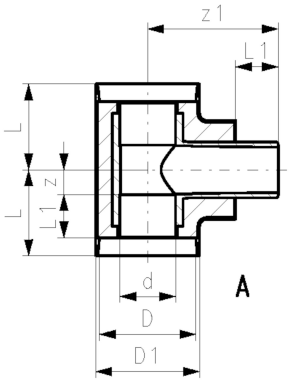

COOL-FIT 4.0 T90° egal, d32-d225

Ausführung:

- Vorisoliertes PE100 SDR11, metrisch
- Isolation aus GF HE Schaum
- Schutzmantel schlagfest. Farbe: schwarz
- A: Elektroschweissfitting mit integrierter Dichtungslippe für eine wasser- und dampfdichte Verbindung

d/D (mm)	PN (bar)	Code	SP	Gewicht (kg)	GP	L (mm)	L1 (mm)	z (mm)	z1 (mm)	Typ	D1 (mm)
32/90	16	**738 203 108**	1	0.161	6	79	36	18	118	A	97
40/110	16	**738 203 109**	1	0.257	6	87	40	22	132	A	117
50/110	16	**738 203 110**	1	0.342	4	94	44	25	138	A	117
63/125	16	**738 203 111**	1	0.514	6	103	48	30	154	A	132
75/140	16	**738 203 112**	1	1.000	2	116	55	36	168	A	147
90/160	16	**738 203 113**	1	1.400	3	130	62	43	187	A	1668
110/180	16	**738 203 114**	1	2.500	1	154	72	57	207	A	188
160/250	16	**738 203 117**	1	5.600	1	192	90	77	263	A	258
225/315	16	**738 203 120**	1	16.748	1	355	110	220	337	A	324

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland
Phone +41 -(0)52-631 1111
e-mail: info.ps@georgfischer.com
Internet: http://www.gfps.com